


■ Real shot display

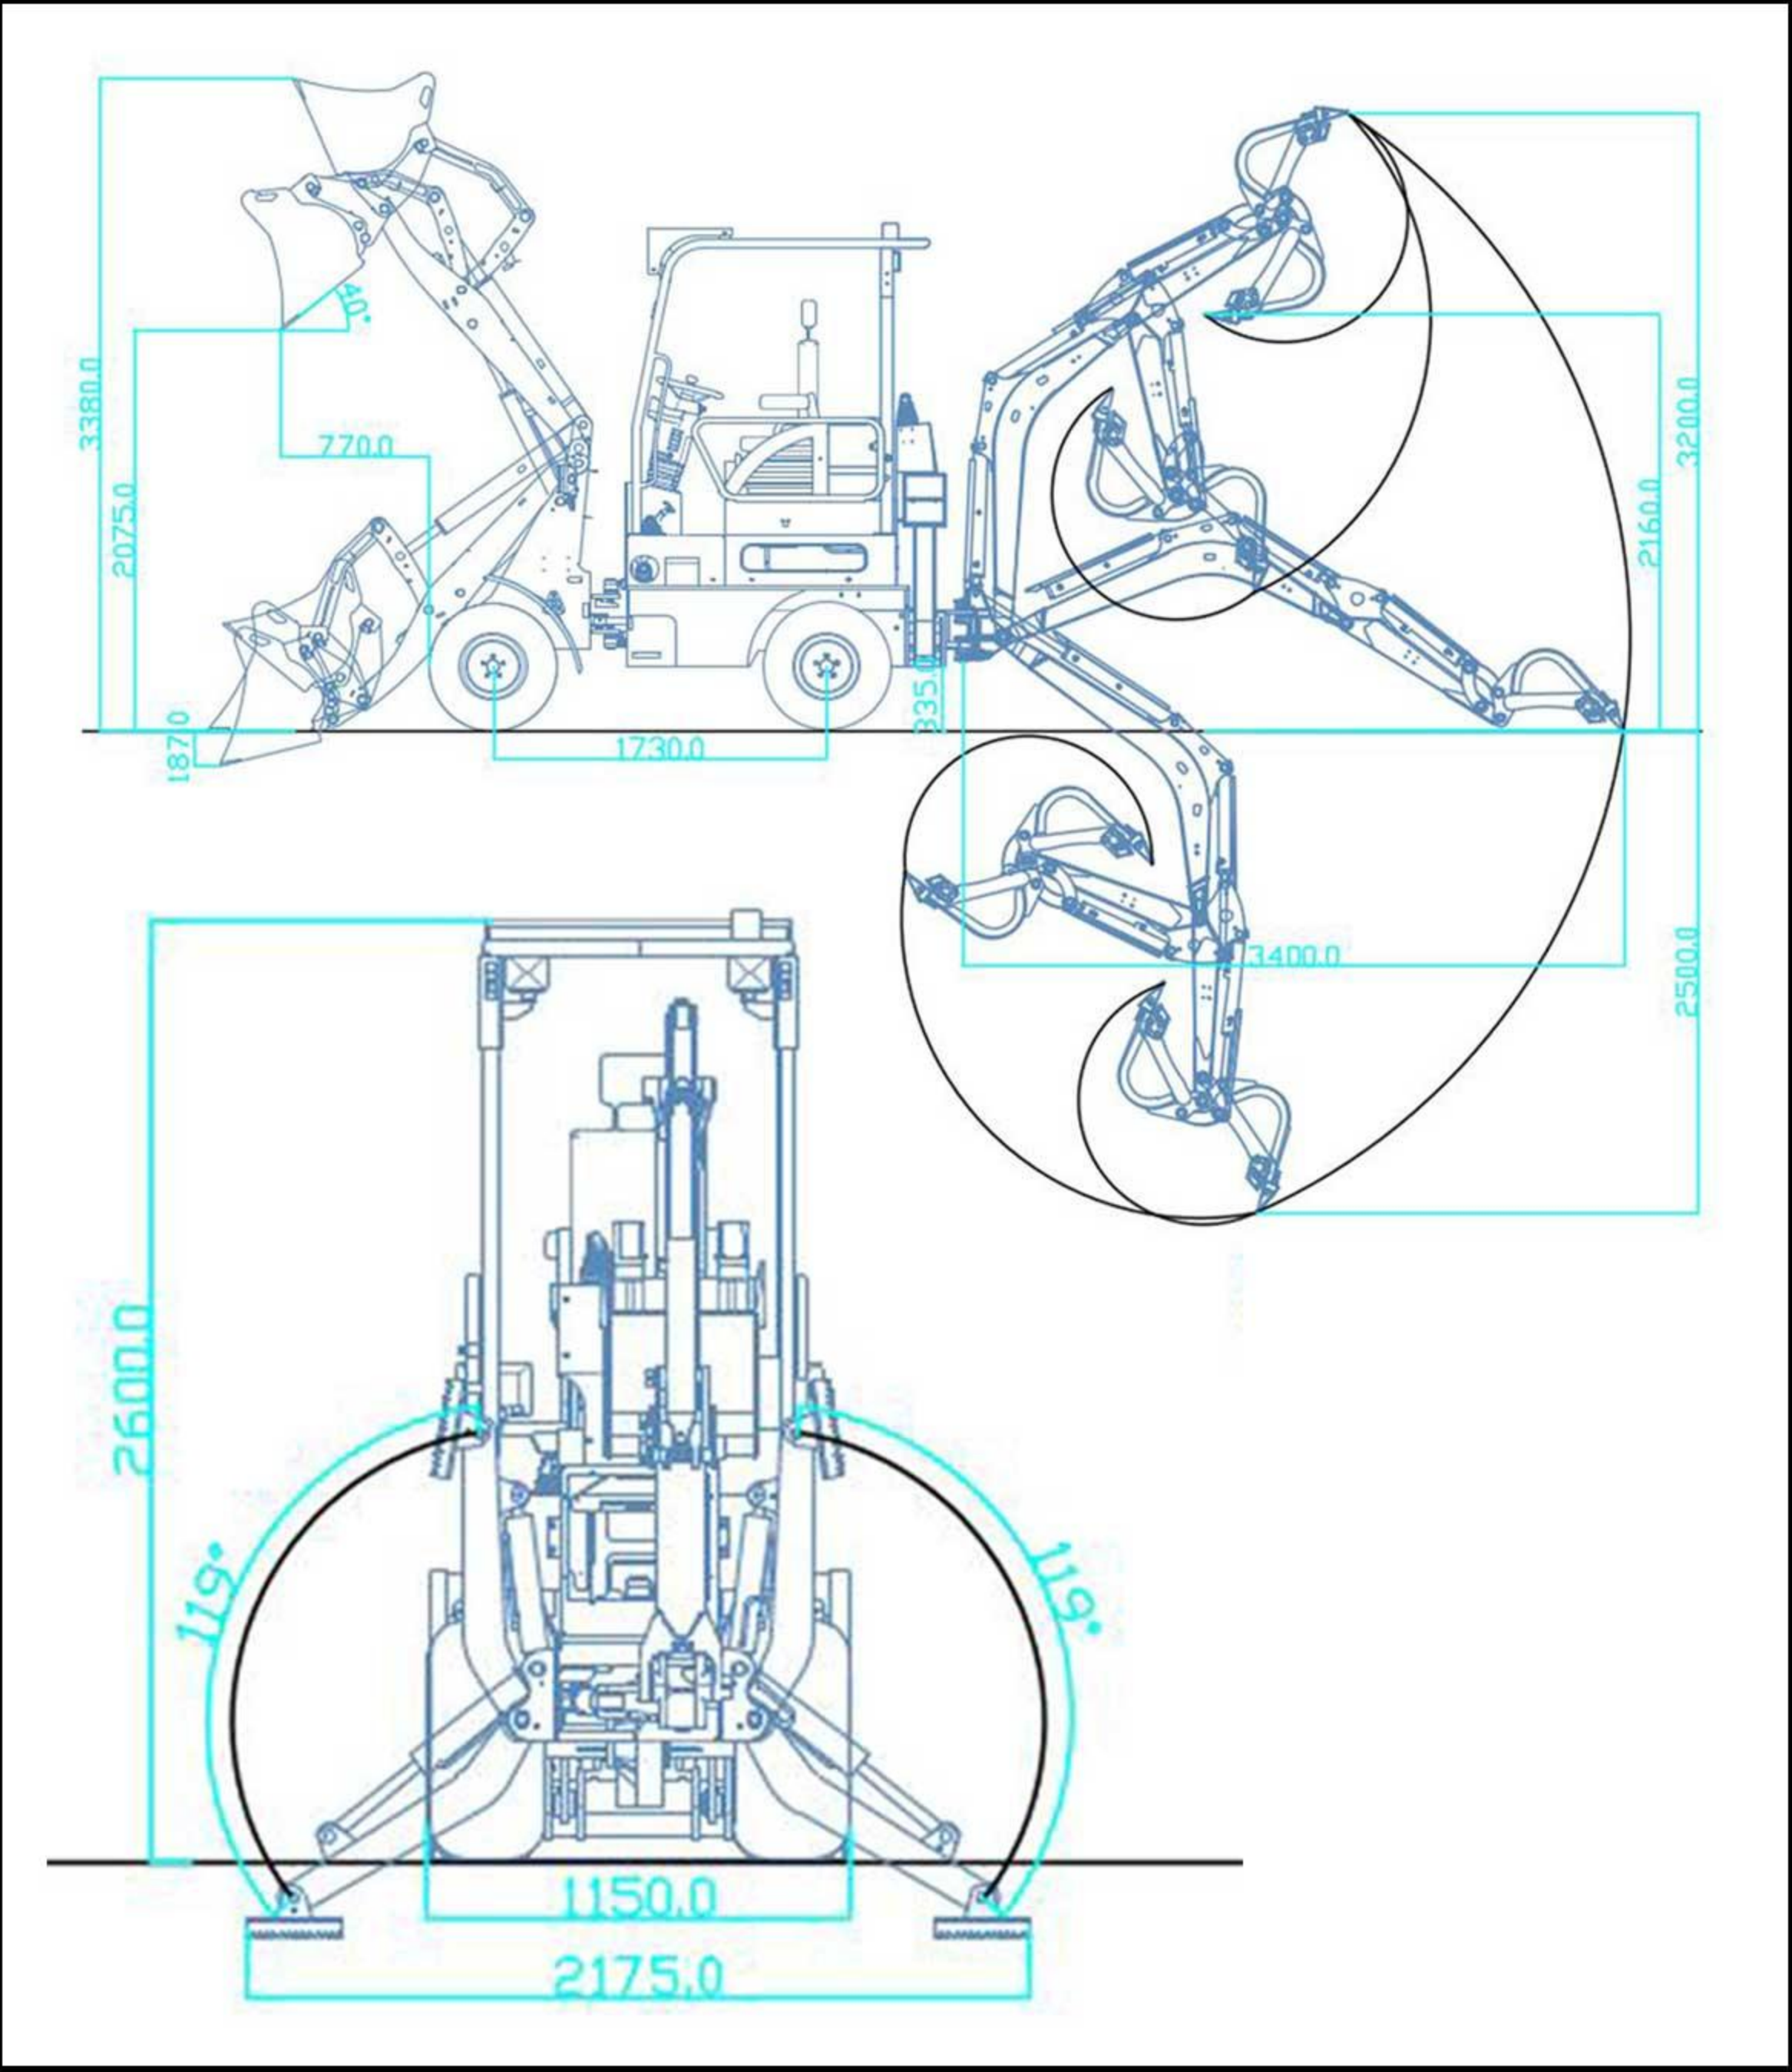

Body data	
Rated bucket loading capacity (m³/ft³)	0.23/8.12
Rated bucket excavation part(m³/ft³)	0.036/1.3
Maximum charging mass (kg/lb)	600/1323
Maximum discharge height (mm/in)	2060/81
Maximum loading height (mm/in)	3380/133
Maximum excavation depth (mm/in)	2500/98
Maximum excavation height (mm/in)	3200/126
Transport height (mm/in)	1150/45
Transport width (mm/in)	2600/102

Excavation hydraulic system	
Main pump model	Gear Pump PGP5114GLP
Main pump brand	TianjinWalking
Rated pressure (MPa/psi)	18/2610.7

Basic parameters			
Overall machine mass (kg/lb)	2325/5134	Maximum driving speed (km/h / mph)	12/7.46
Overall dimensions (mm/in)	5180*1150*2600/203*45*102	Gradeability(%)	25
Bucket width (mm/in)	1150/45	Minimum turning radius (mm/in)	2400/94
Wheelbase (mm/in)	1730/68	Tire specifications	26×12.00-12
Wheelbase (mm/in)	840/33	Hydraulic oil tank (L/ ft³)	28/0.99
Minimum clearance from the ground (mm/in)	155/6	Fuel tank (L/ ft³)	18/0.64

Diesel Engine			
engine model	Kubota D1105	Number of cylinders	3
Rated speed (r/min)	3000	Cooling method	Water cooling
Rated power (kw)	18.4	Fuel form	diesel fuel

- Please read the instruction manual carefully and use it correctly.
 - Be sure to fasten your seat belt during operation. ※Except for soft top specification
 - When driving construction machinery with a body weight of less than 3t, please receive "special education on driving construction machinery for vehicles" in advance, and be sure to participate in "skills training for driving construction machinery for vehicles" if it is more than 3t.
- RB06 According to the conditions of the Occupational Safety and Health Act, the body mass may reach 1200kg
- In order to prevent breakdowns and accidents, be sure to check the machine regularly.



**EXCELLENT PERFORMANCE FULLY
MEET THE NEEDS OF VARIOUS USERS.**



EXCELLENT BASIC PERFORMANCE

CAB DISPLAY



The spacious and bright cab maintains a comfortable driving



Comfortable safety seat equipped with shock absorption function to provide a more comfortable use



The steering wheel and operation panel are fully functional and easy to understand, making it easy to operate



FRONT AND BACK WINGSPAN

Equipped with strong arms at the front and rear and drive.experience.experience.





EXCELLENT OPERABILITY
AND COMFORT

PRODUCT HIGHLIGHTS

Product uses and features

It is widely used in earthwork construction machinery for highways, railways, construction, hydropower, ports, mines and other construction projects.It is mainly used for shoveling bulk materials such as soil, sand, gravel, lime, coal, etc. It can also be used for light shoveling operations on ore, hard soil, etc.

External Display



Show Details



The vehicle is equipped with heating, air conditioning, and spacious and safe seats to ensure the operator's experience. At the same time, the convenient operating system and rugged hardware configuration ensure that it can adapt to a variety of terrains and environments during use.



RELIABLE WORKING PERFORMANCE



Bucket



Console



A sturdy large arm



telescopic arm



Oil pipe

WE ARE RIPPA

Shandong Rippa Machinery Group Co., Ltd. is located in the sixth industrial park of Jining High-tech Zone, Shandong Province. It is a state-owned high-tech enterprise with import and export rights.

The company's employees are energetic and enterprising, constantly creating the legend and fame of the rippa!



Shandong Rippa Machinery Group Co., Ltd.

Address: No. 6 Industrial Park, 2166 Chongwen Avenue, Gaoxin District, Jining City, Shandong Province

Some specifications are based on engineering measurements and may differ from actual conditions. Specifications are for comparison purposes only and are subject to change without notice. Specifications of individual RIPPA devices may vary due to normal variations in design, manufacturing, operating conditions and other factors. Some images of RIPPA devices are not limited to standard packages.



www.rippa.com