

RF20



INTERNAL COMBUSTION FORKLIFT

www.rippa.com

"Reducing Total Operating Costs" with Rippa Innovative Technologies

"Reducing Total Operating Costs" with Rippa Innovative Technologies, The fusion of advanced engine technologies and Rippa's unique hydraulic system enables the new RF20 series to achieve a significant reduction in total operation costs and facilitates superior working performance. Our innovative machines challenge the conventional concept of the forklift.

BEST ENGINE

An optimum engine achieves lower fuel consumption and higher performance.

HYDRAULIC SYSTEM


Provides smooth and precise operation experience, especially in complex and multi-tasking operations

Rippa's Hydraulic System and the NEW Diesel Engine reduce Fuel Consumption


To minimize hydraulic losses and reduce engine load, the new RF20 series uses the tried-and-tested hydraulic system from RIPPA construction machinery. The compact diesel engine offers outstanding performance and reduces fuel consumption by up to 20%.

Contributes to Lower Fuel Consumption and Higher Productivity

The hydraulic load is automatically detected and only the appropriate amount of oil is supplied via a variable displacement pump. This system eliminates the loss of hydraulic oil and reduces the engine load.

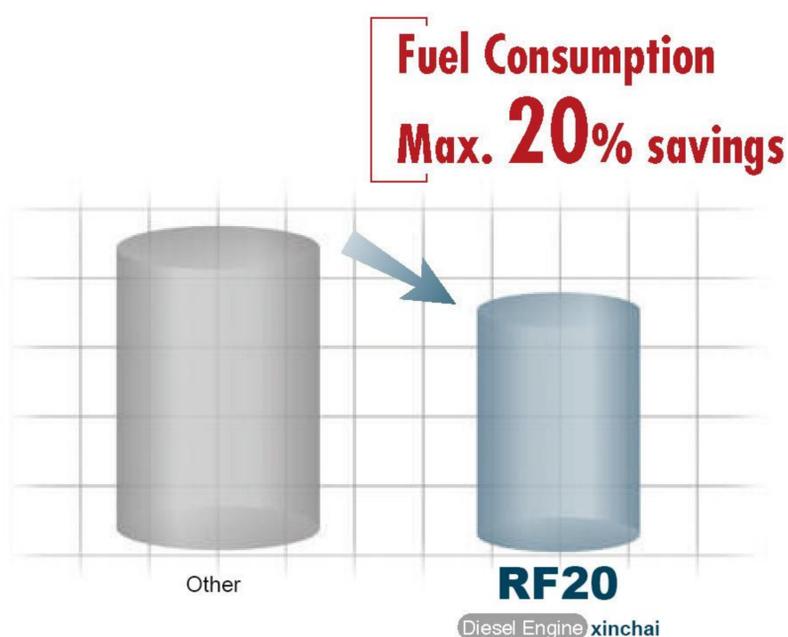


RIPPA tested data, comparison with other models. The results may vary depending on conditions.

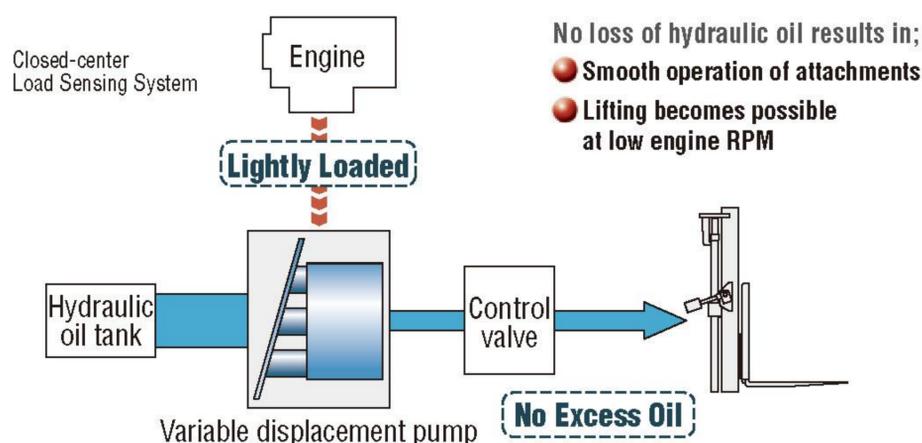

Previous hydraulic system


A fixed amount of oil is supplied from the gear pump and excess oil is returned to the hydraulic oil tank. This resulted in increased engine load.

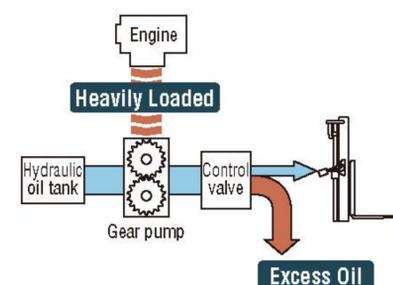

Greatly Reduced Total Operating Costs (Diesel)

Standard hydraulic brake system design, braking effect is fast and smooth. The size of the braking force can be flexibly controlled, only the brake fluid needs to be replaced regularly and the oil pipe needs to be inspected, and no other operating costs are required

Total operating cost (*Image)

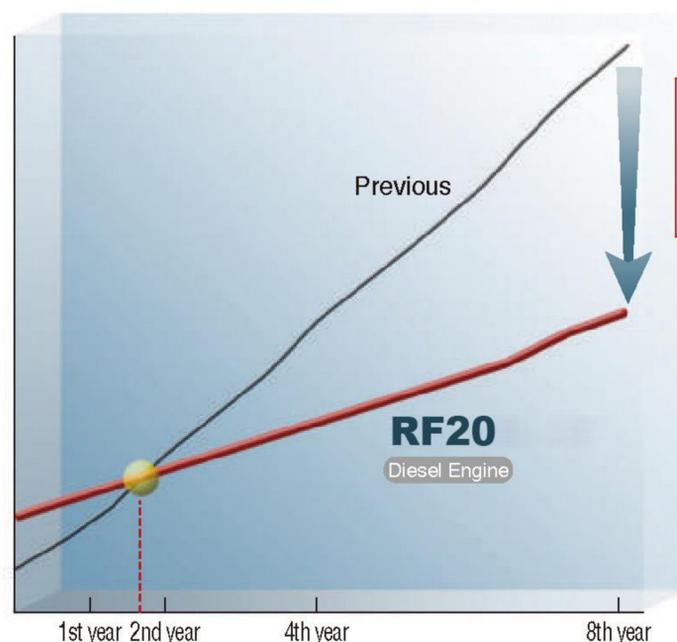


Total operating cost
Approx. 14% savings
(8 years)

Rippa tested data, Comparison with RF20 model. Operation hours: 5 h/day, 25 days/month (Total: Approx. 1500 h/year), Maintenance intervals to manufacturer's recommendation. The results may vary depending on conditions.

*A periodic check and oil replacement are necessary.

Running cost (Accumulated costs for 8 years)


Assuming RF20 as 100%

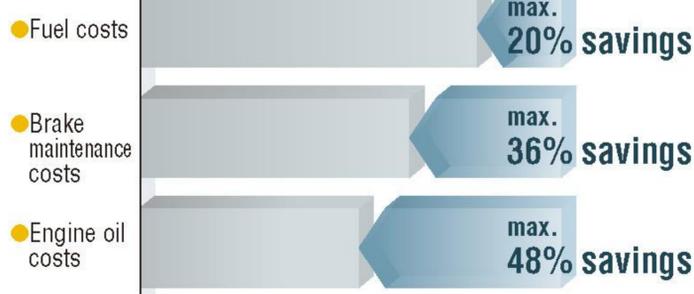

Advanced Technology Offers Reduced CO₂ Emissions (Diesel)

The diesel model uses a new diesel engine combined with a high-efficiency hydraulic system, which can reduce carbon dioxide emissions by approximately 7.2 tons per year.

Annual CO₂ emissions
About **7.2 tons** reduction

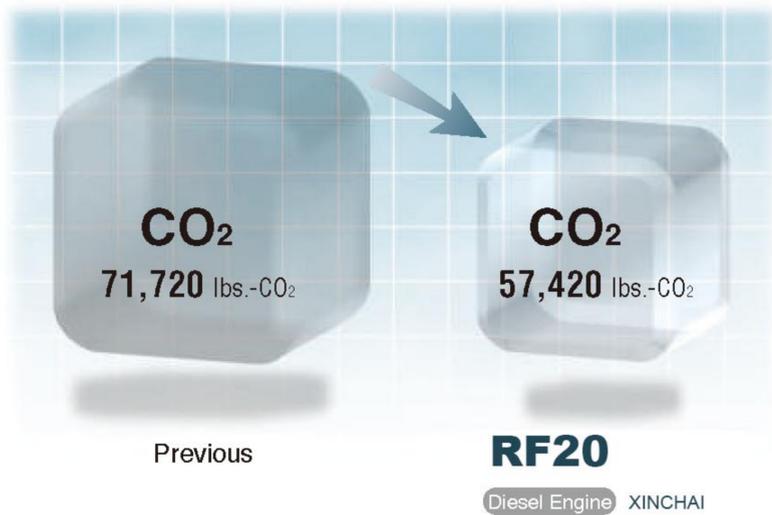

Rippa tested data, Comparison with Xinchai model. The results may vary depending on conditions.

■ An Advanced Diesel Engine conforms to the Latest Emission Regulations

Low fuel consumption and low environmental impact are enabled by elimination of excess combustion and the use of the combined technologies of the high pressure common rail system, electronic control system, new combustion system and air-to-air charge air cooling system.

EURO 5 EMISSION COMPLIANT

CHANGCHAI
POWER

POWER:

18.4KW
24.7HP



■ Cylinder oil seal

The oil cylinder is specially used for Chinese first-tier brand forklifts, and the oil seal is NOK imported from Japan

Euro 5 emission standards

RF20

Lifting height

3000mm

Full load climbing grade

15°/20°

Front track/Rear track

972/970mm



Superior "Productivity" and "Reliability" Satisfy Demanding Operational Needs


Durable hydraulic brakes with good braking feel

Strong braking force, good braking feel, fast response, high stability and easy maintenance. The component connection method makes maintenance and replacement of parts more convenient.



Liquid conduction improves braking stability

Liquid conduction is more stable and is not easily affected by environmental factors such as temperature and humidity. The driver can feel the force and degree of braking more clearly, thus better controlling the vehicle.

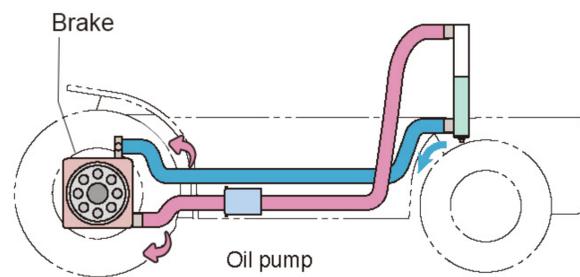

A Cushioning Valve improves the Braking Feel

Rippa's unique cushioning valve enables controlled braking force that precisely reflects the pressure on the brake pedal. The braking behavior is improved, and the operator has greater control.


- Strong braking force
- Rapid and smooth braking effect
- Good braking feel, leading to better vehicle control
- downtime and maintenance costs are reduced.

First-class Productivity is achieved

First-class Cycle Time

The diesel models utilize a compact xinchai engine with the advanced hydraulic system to achieve high productivity and first class cycle times. The gasoline engine model is also designed to achieve higher productivity.

- The NEW RF20 Series achieves high productivity equivalent to the previous R Series.

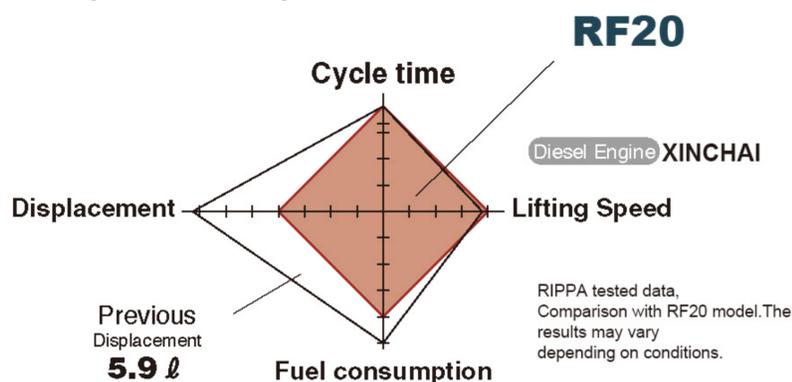

- Speed increase (full load/no load) **350/500mm**
- Speed decreasefull (full load/no load) **550/450mm**
- Maximum traction (full load/no load) **17kn**

The CLSS enables Lifting at Low Engine RPMs

The CLSS makes it possible to lift the load for fine height adjustment without increasing the engine speed.

Reduced engine RPM in the following cases:

- Fine adjustment of fork height
- Lifting fork tips before starting
- Fine adjustment for side shifting

The CLSS enables advantages such as:

- Smooth traveling during hydraulic operation
- Superior productivity when fitted with attachments
- Fuel consumption reduced by up to 20% (Diesel)

Fully Hydrostatic Power Steering for Superb Maneuverability

The Fully Hydrostatic Power Steering (FHPS) system facilitates fully stationary steering as well as switchback operations using the small diameter steering wheel. The system has a superior response capability so that the operator can maneuver easily with a load even in a tight area.

Excellent Durability To Handle Demanding Work Cycles

Rugged Design with High Rigidity

The highly rigid mast, frame, and front and rear axles ensure outstanding reliability even when performing heavy-duty work.

[Mast]

A heavy mast rail profile for excellent rigidity.

[Frame]

Increased thickness for greater durability of the counterweight mounting section.

[Front axle]

New field proven design adopted from Komatsu wheel loader construction equipment.

[Rear axle]

The durability of the Power Steering cylinder is improved.

Improved Reliability in the Hydraulic and Electrical Systems

The main hydraulic pipe connectors use O-ring face seals to reduce the possibility of leaks. Waterproof connectors are used in the main harnesses and the system controller in order to provide higher resistance to water and dust. Hydraulic and electrical piping systems are in separate configurations to improve reliability and ease of service.

Engine Protection Systems to Keep the Engine in the Best Operating Condition

The electronic engine controls upgrade the performance of the engine protection system (fail-safe functions).

- **Trouble diagnosis:**
Engine malfunctions are automatically detected and an alarm lamp blinks.
- **Overheating prevention (Diesel):**
The engine output and RPMs are reduced when the coolant temperature is high.
- **Automatic engine warm-up (Diesel):**
The RPMs are accelerated to warm up the engine at low temperatures.
- **Automatic air pre-heating (Diesel):**
The engine is automatically pre-heated when starting at low temperatures.



Display Instruments



The Compact 2t model

The compact 2t. model features a shorter wheelbase and better maneuverability while maintaining the power and speed capable of achieving high productivity.



Full height roof protection frame:
2085mm

Fork length
1070mm

Wheelbase (front/rear)
972/970mm



Advanced Design in Pursuit of "Safety and Comfort"

The reinforced gantry adopts independent side roller design.

Chain

Branded chains can bear more than five times the weight and have third-party test reports



Side scroll wheel

Adopt independent side roller design, the gap between door frames is small and does not wear the door frames, and the door frames will not shake after long-term use



Parking Brake Alarm

If the operator fails to engage the parking brake, an alarm will sound.



An Optional Wide Angle Center Mirror enables an Easy View Rearward



A Neutral Safety Function to Prevent an Inadvertent Start

The engine cannot be started unless the F-R switch is in the neutral position.



Neutral indicator for at-a-glance information

ANSI/ITSDF B56.1 Compliant Enhanced Overhead Guard for Operator Protection and

A Safety Mechanism that prevents starting the engine unless the brake pedal is depressed



Secure Operation Controls Improve Operator Work Efficiency

Secure Lever Controls with Minimum Movement




Finger-tip operation with the electric F/R lever

A Smaller Steering Wheel Permits Widened Forward Visibility


Use of a smaller steering wheel and redesigned dashboard have improved the visibility to the bottom of the forks, thus enhancing the lifting function.

Steering wheel diameter: 11.8"

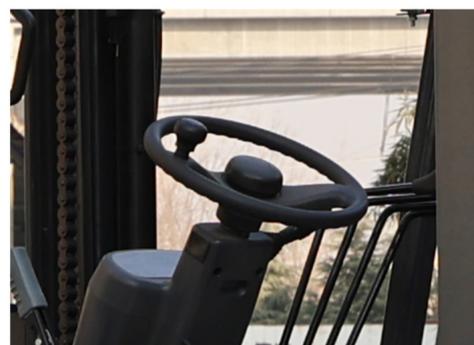

Improved Braking Feel

Rippa's unique cushioning valve enables control of the braking force in proportion to the pressure on the brake pedal and improves the braking feel.



Control levers with contoured knobs for ease of control

Greater Operator Comfort and Reduced Fatigue in Even the Toughest Applications

Dual Floating Structure Reduces Vibrations

A unique dual vibration cushioning system reduces vibrations in the compartment, steering wheel, control levers and the mast. Any vibrations transmitted from the engine or road surface are quickly absorbed. The system is friendly to both the operator and the load.



Full Suspension Seat for Improved Operator Comfort

The deluxe full suspension seat features improved vibration resistance and reduced stress on the body.

- Seat cushion adjustment dial
- Retractable seat belt
- Semi-enclosed seat, more comfortable




Reduced Exposure to Hot Air/Exhaust Gas When Driving in Reverse

Two counterweight air outlets are provided on the left and right sides and an exhaust pipe outlet is provided at a lower position so that the operator is not exposed to hot air from the radiator or to exhaust gasses when driving in reverse.




Exhaust outlet

Smooth Entry and Exit



Enlarged assist grip



Improved engine hood and wide open step design

The Low Noise Design

The low-noise design of the engine and the fully sealed floorboard area reduce offending noise during operation.

Exhaust gas purification device

Reduce the emission of harmful gases from the engine and effectively protect the environment

Careful Designs Facilitate Easier Serviceability

Filter Layout Optimized for Improved Serviceability

A fully-opening floor plate.

Easy Radiator Cleaning



Air Filter

Battery



Heat sink

Wide Opening Engine Hood with a Lock for Easy Servicing

Locking engine hood provides protection while servicing



PRODUCT PARAMETERS

Model	Name	Unit	RF20
Model	Power type		Internal combustion engine (diesel)
	Rated load	Kg (lb)	2000 (4409)
Size	Load center distance	mm (in)	500 (19.7)
	Maximum lifting height of fork shelf with blocking	mm (in)	4060 (159.8)
	Maximum lifting height	mm (in)	3000 (118.1)
	Free lifting height	mm (in)	100 (3.9)
	Full height roof protection frame	mm (in)	2085 (82.1)
	Full length without fork	mm (in)	2282 (89.8)
	Front overhang distance	mm (in)	471 (18.5)
	Rear overhang	mm (in)	475 (18.7)
	Wheel base	mm (in)	1600 (63)
	Minimum ground clearance	mm (in)	125 (4.9)
	Full width	mm (in)	1180 (46.5)
	Track width front/rear	mm (in)	972/970 (38.3/38.2)
	Gantry tilt Angle(front/back)	°	6 front and 12 rear
	Fork length	mm (in)	1070 (42.1)
Mechanical properties	Maximum climbing capacity full load/no load	%	15/20
Weight	Total weight	Kg (lb)	3400 (7496)
Wheels and tires	Number of wheels x/drive wheel		2X/2
	Tire type front/rear		Pneumatic tire
	Front tire		7.00-12
	Rear tire		6.00-9
	Service brake		Hydraulic brake
	Parking brake		Mechanical
Drive, transmission control device	Engine model		changchai390(Euro 5)/changchai390(Euro 3)
	Engine power	KW (hp)	18.4(24.7)/22.1(29.6)

WE ARE RIPPA

Shandong Rippa Machinery Group Co., Ltd. is located in No. 39, Guang'an Road, Liuhan Sub-district Office, High-tech Zone, Jining City, Shandong Province. It is a state-level high-tech enterprise with the right to import and export;

The company's staff are vigorous and enterprising, and constantly create the legend and glory of the rippa!



Shandong Rippa Machinery Group Co., Ltd.

Add: No. 39, Guang'an Road, Liuhan Sub-district Office, High-tech Zone, Jining City, Shandong Province.

Some specifications are based on engineering measurements and may deviate from actual conditions. Specifications are for comparison purposes only and are subject to change without notice. Specifications of individual RIPPA equipment will vary based on normal variations in design, manufacturing, operating conditions and other factors. Some pictures of RIPPA equipment are not limited to standard packages.



www.rippa.com